

ASMATAVAN AYDINLATMA SERİSİ

SUSPENDED CEILING LIGHTING SERIES

GTI-AT

GTI-AT9S

GTI-AT18S

GTI-AT36S

GTI-AT36S1

GTI-AT50S



Teknik Özellikler - Technical Specifications

- Ürünün gövdesi; DKP sac gövde
- Mükemmel termal performans
- Ömür: >50.000 saat, PF: >95%
- Giriş gerilimi : 220-240V Frekans: 50-60 Hz
- Renksel ger. ind. (CRI): >70
- Güç faktörü: >0,95
- 3 yıl garanti.
- Die-cast DKP sheet metal body
- Excelant thermal performance
- Life: >50.000 h, PF:>95%
- Input voltage: 220-240V Frequency: 50-60 Hz
- Colour Ren. In(CRI): >70
- Power Fac. :>0,95
- 3 year warranty

Ürün Kodu Product Code	Güç Power (W)	Işık Akısı Lumen (lm)	Renk Sıcaklığı Color Temperatures (k)	Ürün Ağırlık Product Weight (kg)	Ürün Ebatları Product Sizes (mm)	Brüt Ağırlık Gross Weight (kg)	Kutu Ebatları Package Sizes (mm)
GTI-AT9S	9	1215	3000-6500	1,3	294x294x55	1,7	315x315x70
GTI-AT18S	18	2430	3000-6500	2,2	594x294x55	2,6	615x315x70
GTI-AT36S	36	4860	3000-6500	2,9	594x594x55	3,0	615x615x70
GTI-AT36S1	36	4860	3000-6500	2,9	1194x294x55	3,0	1220x315x70
GTD-AT50S	50	6750	3000-6500	2,9	594x594x55	3,0	615x615x70

Opsiyonlar - Options

Acil Durum Kiti: Var (1-3 saat)
Emergency Kit: Yes (1-3 hours)
Dimleme Protokolü : Uygun
Dimming Protocol: Available

Uygulama Alanları - Filed of Application



OTELLER



KORİDORLAR



ALIŞVERİŞİ MERKEZLERİ




MARKETLER



TOPLANTI SALONLARI

Teknik Çizim - Technical Drawing

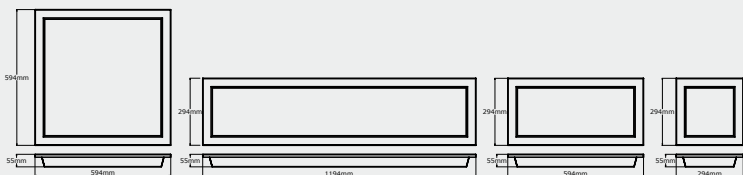

Fotometrik Veri - Photometric Data

