


# KANOPI AYDINLATMA SERİSİ

## CANOPY LIGHTING SERIES

### GTD-02KP

GTD-02KP-70 / GTD-02KP-90 / GTD-02KP-120

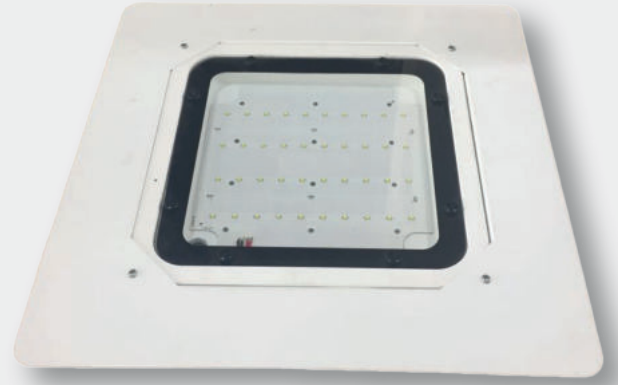

#### Teknik Özellikler - Technical Specifications


- Ürünün gövdesi; alüminyum enjeksiyon
- Mükemmel termal performans
- Ömür: >50.000 saat, PF: >95%
- Giriş gerilimi : 220-240V Frekans: 50-60 Hz
- Renksel ger. ind. (CRI): >70
- Güç faktörü: >0,95
- 3 yıl garanti.
- Die-cast aluminium
- Excelant thermal performance
- Life: >50.000 h, PF:>95%
- Input voltage: 220-240V Frequency: 50-60 Hz
- Colour Ren. In(CRI): >70
- Power Fac. :>0,95
- 3 year warranty

Ürün Kodu Product Code	Güç Power (W)	Işık Akısı Lumen (lm)	Renk Sıcaklığı Color Temperatures (k)	Ürün Ağırlık Product Weight (kg)	Ürün Ebatları Product Sizes (mm)	Brüt Ağırlık Gross Weight (kg)	Kutu Ebatları Package Sizes (mm)
GTD-KP02-70	70	9450	3000-6500	4,3	330*330*60	4,8	350*350*80
GTD-KP02-90	90	12150	3000-6500	4,5	330*330*60	5,0	350*350*80
GTD-KP02-120	120	16200	3000-6500	4,8	330*330*60	5,3	350*350*80

#### Opsiyonlar - Options

Acil Durum Kiti: Var (1-3 saat)  
Emergency Kit: Yes (1-3 hours)  
Dimleme Protokolü : Uygun  
Dimming Protocol: Available

#### Teknik Çizim - Technical Drawing

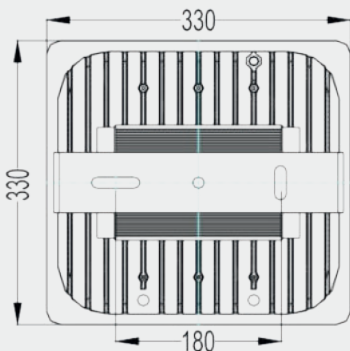

#### Uygulama Alanları - Filed of Application



#### Fotometrik Veri - Photometric Data

