

SIVAÜSTÜ AYDINLATMA SERİSİ

SURFACE MOUNTED LIGHTING SERIES

GTI-SU



GTI-SU9S

GTI-SU18S

GTI-SU36S

GTI-SU36S1

GTI-SU50S



Teknik Özellikler - Technical Specifications


- Ürünün gövdesi; DKP sac gövde
- Mükemmel termal performans
- Ömür: >50.000 saat, PF: >95%
- Giriş gerilimi : 220-240V Frekans: 50-60 Hz
- Renksel ger. ind. (CRI): >70
- Güç faktörü: >0,95
- 3 yıl garanti.
- Die-cast DKP sheet metal body
- Excelant thermal performance
- Life: >50.000 h, PF:>95%
- Input voltage: 220-240V Frequency: 50-60 Hz
- Colour Ren. In(CRI): >70
- Power Fac. :>0,95
- 3 year warranty

Ürün Kodu Product Code	Güç Power (W)	Işık Akısı Lumen (lm)	Renk Sıcaklığı Color Temperatures (k)	Ürün Ağırlık Product Weight (kg)	Ürün Ebatları Product Sizes (mm)	Brüt Ağırlık Gross Weight (kg)	Kutu Ebatları Package Sizes (mm)
GTI-SU9S	9	1215	3000-6500	1,3	300x300x55	1,5	315x315x80
GTI-SU18S	18	2430	3000-6500	2,7	600x300x65	3,2	615x315x80
GTI-SU36S	36	4860	3000-6500	4,2	600x600x65	4,6	615x615x80
GTI-SU36S1	36	4860	3000-6500	4,2	1200x300x65	4,6	1220x315x80
GTD-SU50S	50	6750	3000-6500	4,2	600x600x65	4,6	615x615x80

Opsiyonlar - Options

Acil Durum Kiti: Var (1-3 saat)
Emergency Kit: Yes (1-3 hours)
Dimleme Protokolü : Uygun
Dimming Protocol: Available

Teknik Çizim - Technical Drawing

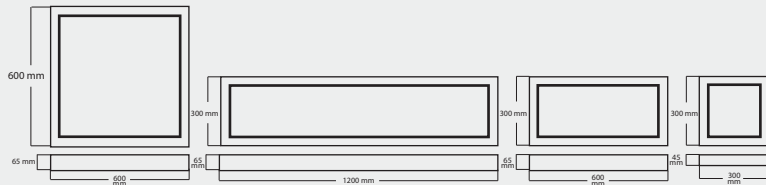

Uygulama Alanları - Filed of Application



Fotometrik Veri - Photometric Data

Işık Şiddeti Dağılım Eğrisi
Light Distribution Curve

