

SOKAK LAMBASI SERİSİ

STREET LIGHTING SERIES

GTD-150S



GTD-150S85

GTD-150S100

GTD-150S110


GTD-150S125

GTD-150S150



IP
66

IK
10

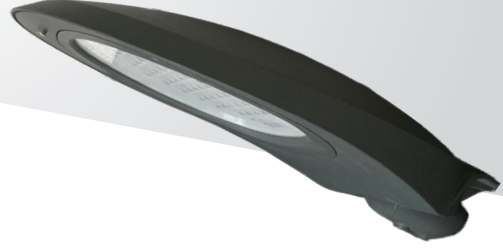

TR

- Ürünün gövdesi; alüminyum enjeksiyon
- Mükemmel termal performans
- Ömür: >50.000 saat, PF: >95%
- Giriş gerilimi : 220-240V Frekans: 50-60 Hz
- Renksel ger. ind. (CRI): >70
- Güç faktörü: >0,95
- 90° ayarlanabilir montaj açısı (±10)
- 3 yıl garanti.

EN

- Die-cast aluminium
- Excelant thermal performance
- Life: >50.000 h, PF:>95%
- Input voltage: 220-240V Frequency: 50-60 Hz
- Colour Ren. In(CRI): >70
- Power Fac. :>0,95
- 90 ° adjustable mounting angle (± 10)
- 3 year warranty

UYGULAMA ALANLARI

Field of applications



ŞEHİR İÇİ
YOLLAR



MEYDANLAR



BİNA ÇEVRESİ




PARKLAR



AÇIK
OTOPARKLAR

Ürün Kodu Product Code	Güç Power (W)	Işık Akısı Lumen (lm)	Renk Sıcaklığı Color Temperatures (k)	Ürün Ağırlık Product Weight (kg)	Ürün Ebatları Product Sizes (mm)	Brüt Ağırlık Gross Weight (kg)	Kutu Ebatları Package Sizes (mm)
GTD-150S85	85	11475	4000-6500	6,7	295*620*152	7,3	670*335*190
GTD-150S100	100	13500	4000-6500	6,7	295*620*152	7,3	670*335*190
GTD-150S110	110	14850	4000-6500	6,7	295*620*152	7,4	670*335*190
GTD-150S125	125	16875	4000-6500	6,8	295*620*152	7,3	670*335*190
GTD-150S150	150	20250	4000-6500	6,8	295*620*152	7,4	670*335*190

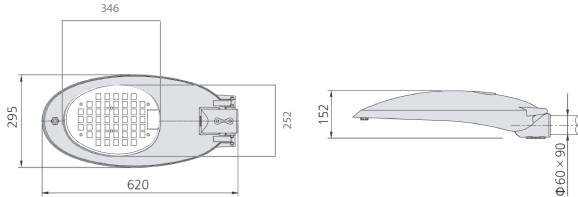

Kalıp Resimleri Mold pictures;

