

GTD-01KP90/GTD-01KP120

Алюминиевое инъекционное литье

PF: >%95

Жизнь: >50000 h

IP 65

приложений: магазины, автозаправочные станции, гостиницы, офисы, жилье, пассажирские терминалы


- Die-cast aluminium
- Excellent thermal performance
- Life: >50000 h
- IP 65
- PF: 95%

Field of applications: Gas stations, passenger terminals, transit and checkpoint, corporate company buildings entry, hotels, offices and dwellings



Model	Güç (W)	Giriş Voltajı	Lümen (lm)	Renk Sıcaklığı	Kutu Ölçüsü (mm)	Net Ağırlık (kg)	Brüt Ağırlık (kg)	20" Konteyner	40" Konteyner
Model	Power (W)	Input Vol.	Lumen (lm)	Color Temperatures	Packing Size (mm)	Net Weight (kg)	Gross Weight (kg)	20" Container	40" Container
GTD-01KP90	90	230V - 50HZ	13500	3000-6500 K	340X340X170	6.5	8	1679	3409
GTD-01KP120	120	230V - 50HZ	18000	3000-6500 K	340X340X170	7	8.5	1679	3409

WHITE

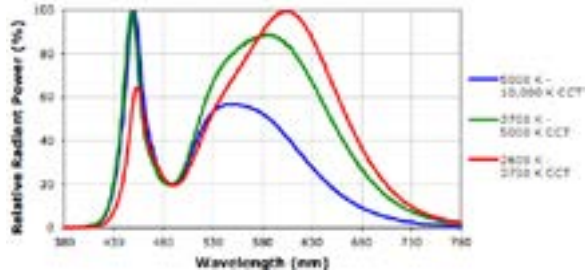

COLOR

